

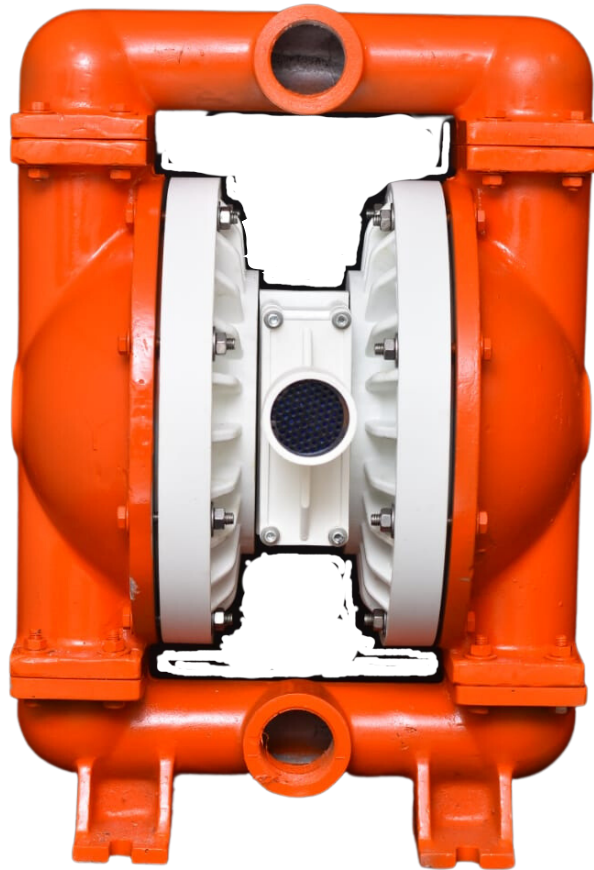
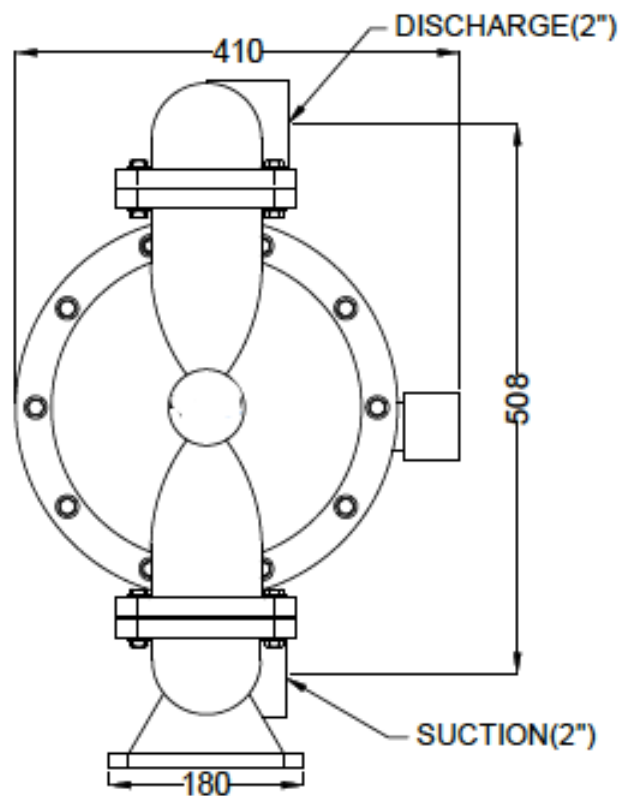



2" Metallic Model (AOD 500 ATT)

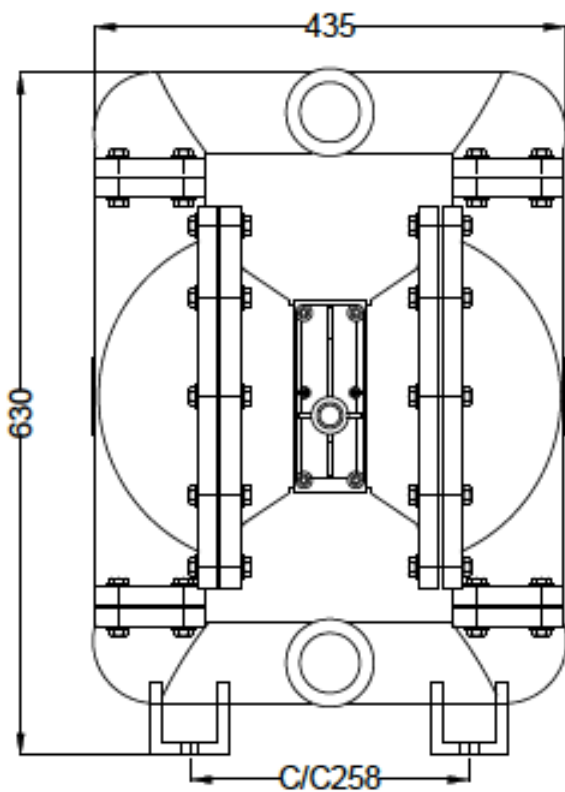

Max Flow rate :	586 LPM
Port Size :	Inlet : 50.80mm (2" BSP) Discharge : 50.80mm (2" BSP) Air Inlet : 1/2" BSP Air Exhaust : 19.05mm (3/4 " BSP)
Suction Lift :	Dry : 4.57m (15') Wet : 7.62m (25')
Teflon :	Dry : 3.05m (10') Wet : 6.09m (20')
Max Particle Size :	6.35mm (0.250")
Weight :	35-40 Kg
Max Discharge Head :	60 meter

For TEFLON diaphragms, reduce water discharge figures by 20%

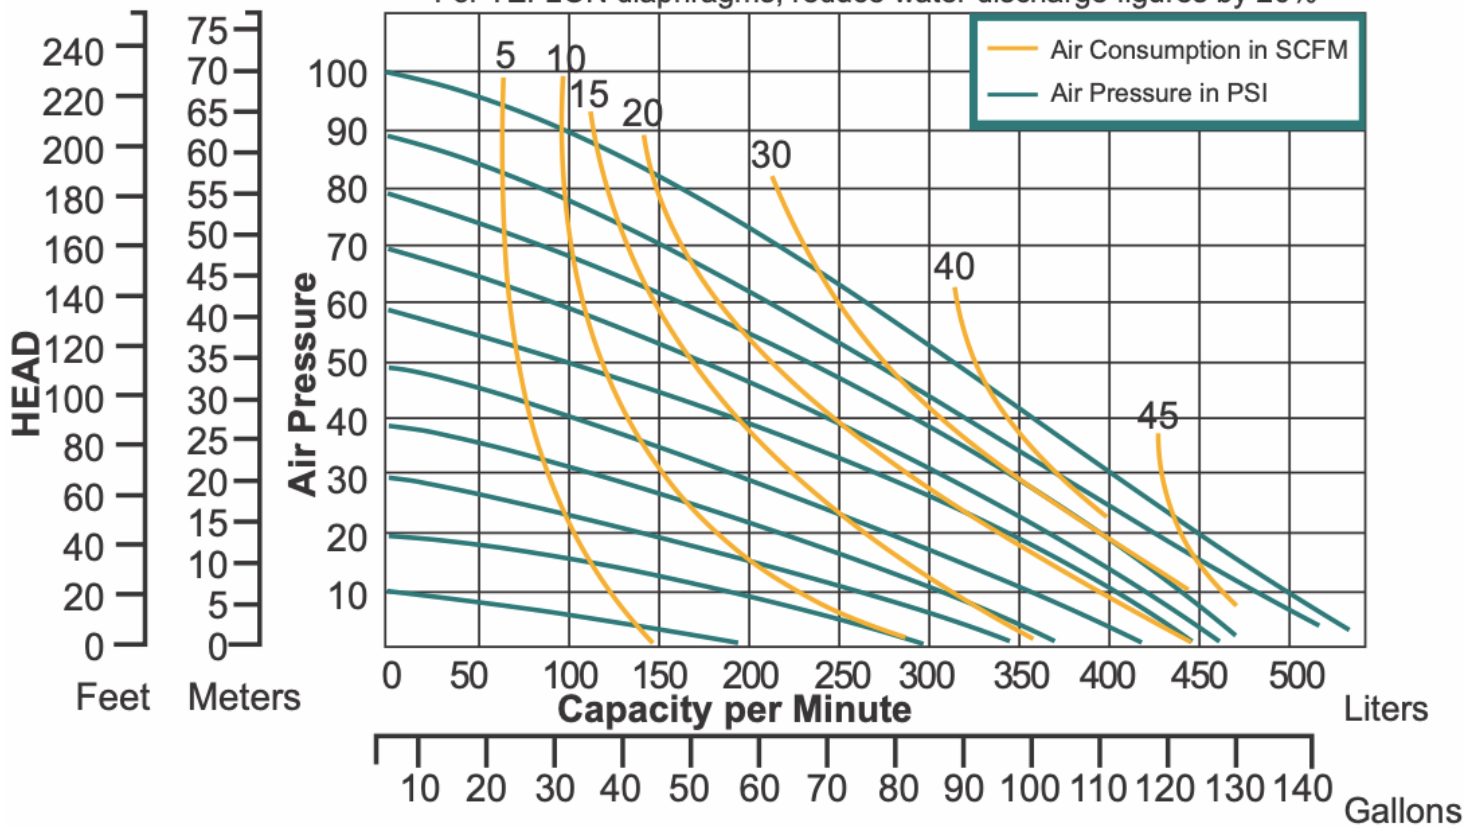

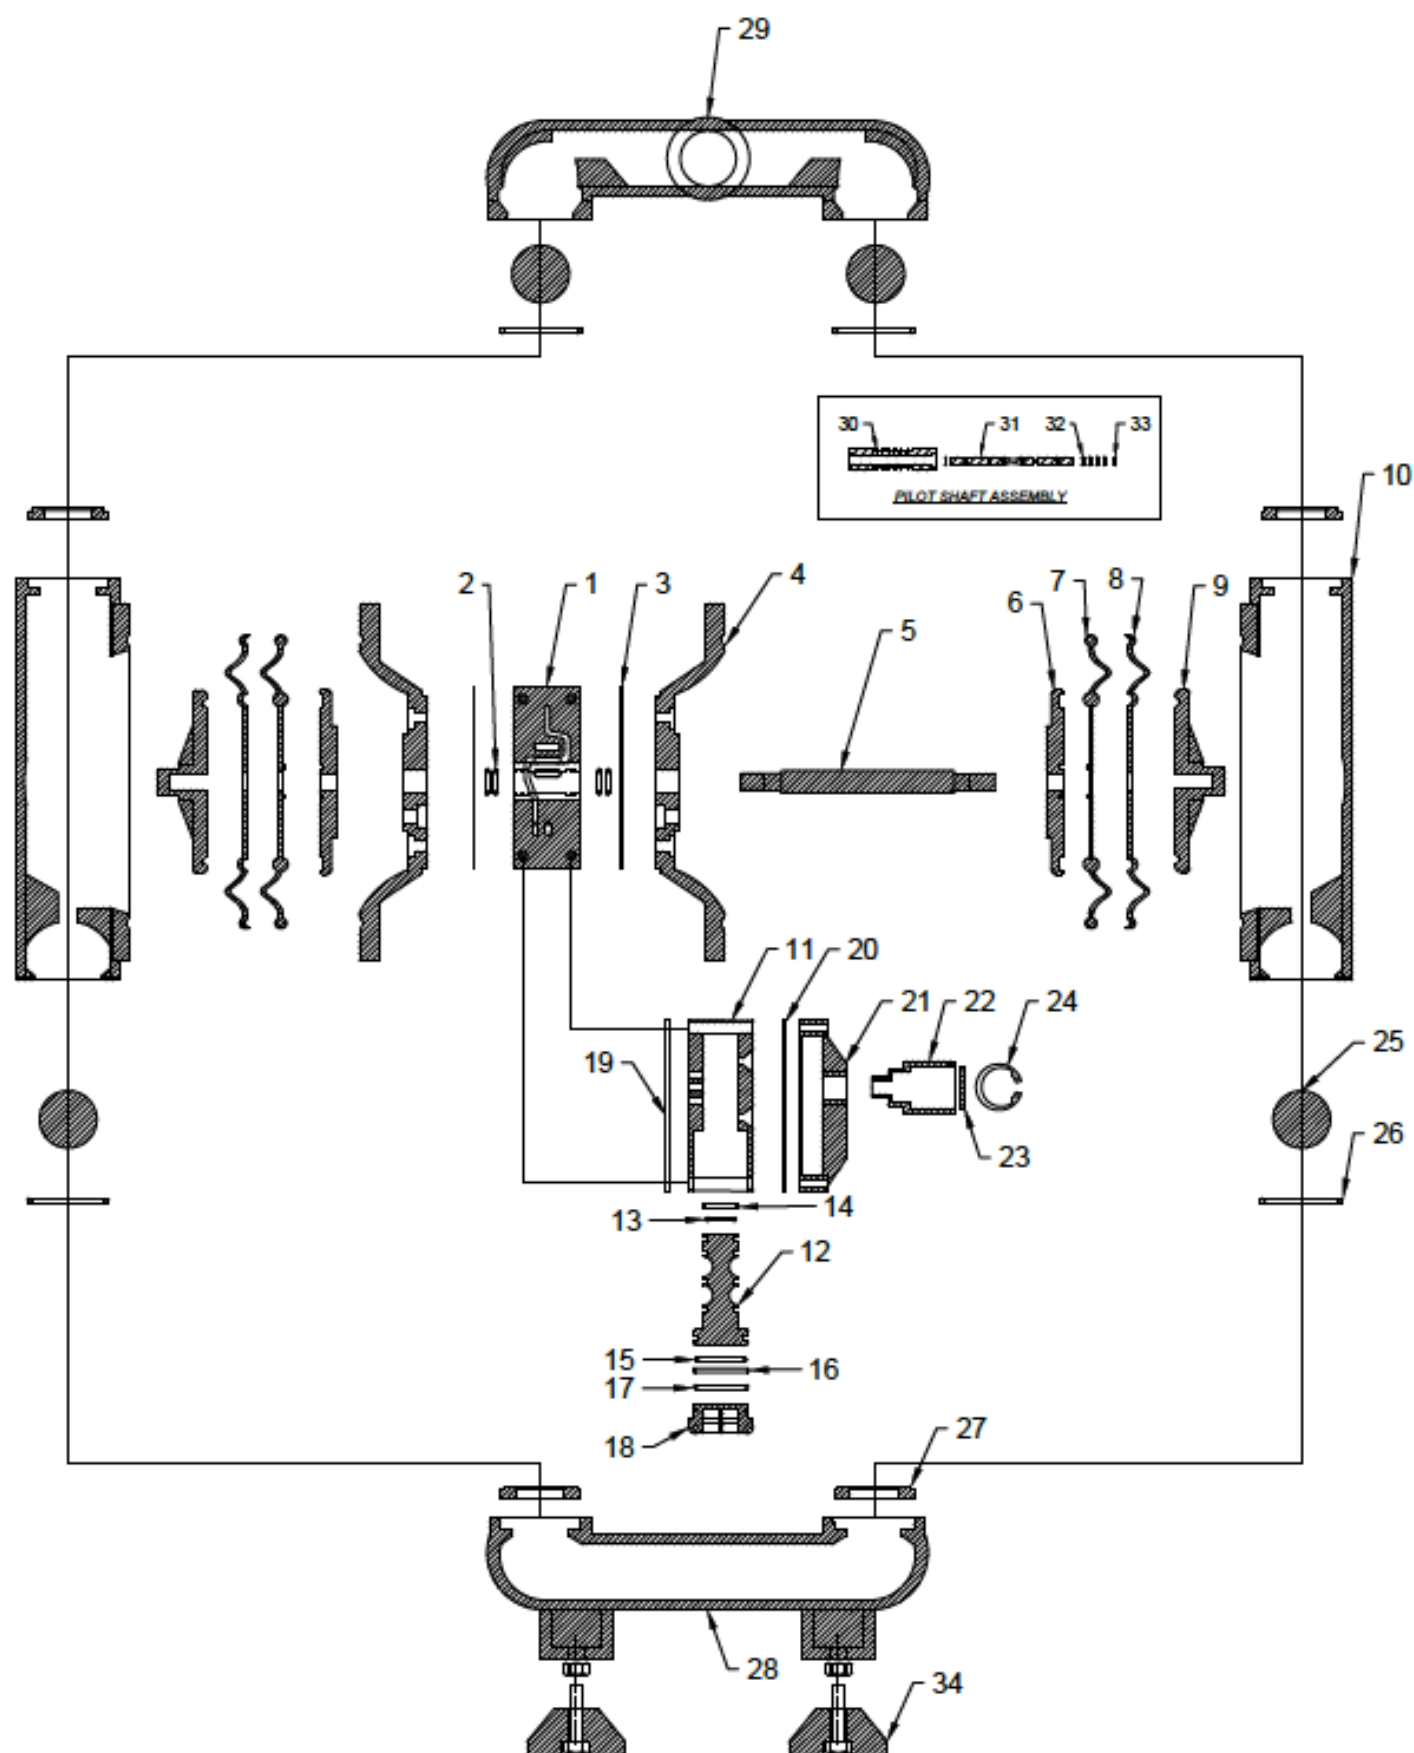

Sr No.	PART NAME	M.O.C.	Qty.	Sr No.	PART NAME	M.O.C.	Qty.
1	Shaft Block	GFPP	01	23	Exhaust Plate	MS	02
2	Main Shaft 'O' Ring	Neoprene	04	24	CirClip	SS-304	01
3	Air-Cover Gasket	Neoprene	02	25	NRV Ball	Santoprene	04
4	Air-Cover	Aluminium	02	26	Seat O Ring	Teflon	04
5	Main Shaft	SS-304	01	27	Ball Seat	Aluminium	04
6	Holding Plate	Aluminium	02	28	Suction Line	Aluminium	01
7	Back Up	Santoprene	02	29	Discharge Line	Aluminium	01
8	Diaphragm	Teflon	02	30	Pilot Bush	Brass	01
9	Lock-Nut	Aluminium	02	31	Pilot Shaft	SS-304	01
10	Liquid Chamber	Aluminium	02	32	Pilot Shaft O Ring	Polyurethane	04
11	Piston Block	PP	01	33	Pilot Shaft lock oring	Neoprene	02
12	Piston	PVC	01	34	Mounting Pad	Rubber	04
13	Piston O Ring(Small)	Neoprene	04	35	Liquid Chamber Lock Bolt & Nut 3/8"X2 1/2"	SS-304	20
14	Piston Ring(Small)	PTFE(bronze)	04	36	Suction & Discharge line Lock Bolt & Nut 3/8"X2 "	SS-304	16
15	Piston O Ring(Big)	Neoprene	01	37	Piston Block Allen Bolt 1/4" x 4 1/4"	MS	04
16	Piston Ring(Big)	PTFE(bronze)	01	38	Air Assembly Lock Bolt & Nut 5/16"X4"	SS-304	04
17	Piston Block CaP O Ring	Neoprene	01				
18	Piston Block Cap	PP	01				
19	Piston Block Gasket	Neoprene	01				
20	Piston Block Gasket	Neoprene	01				
21	Piston Block Cover	PP	01				
22	Exhausts	PP	01				