




1" Metallic Model (AOD 300 ATT)

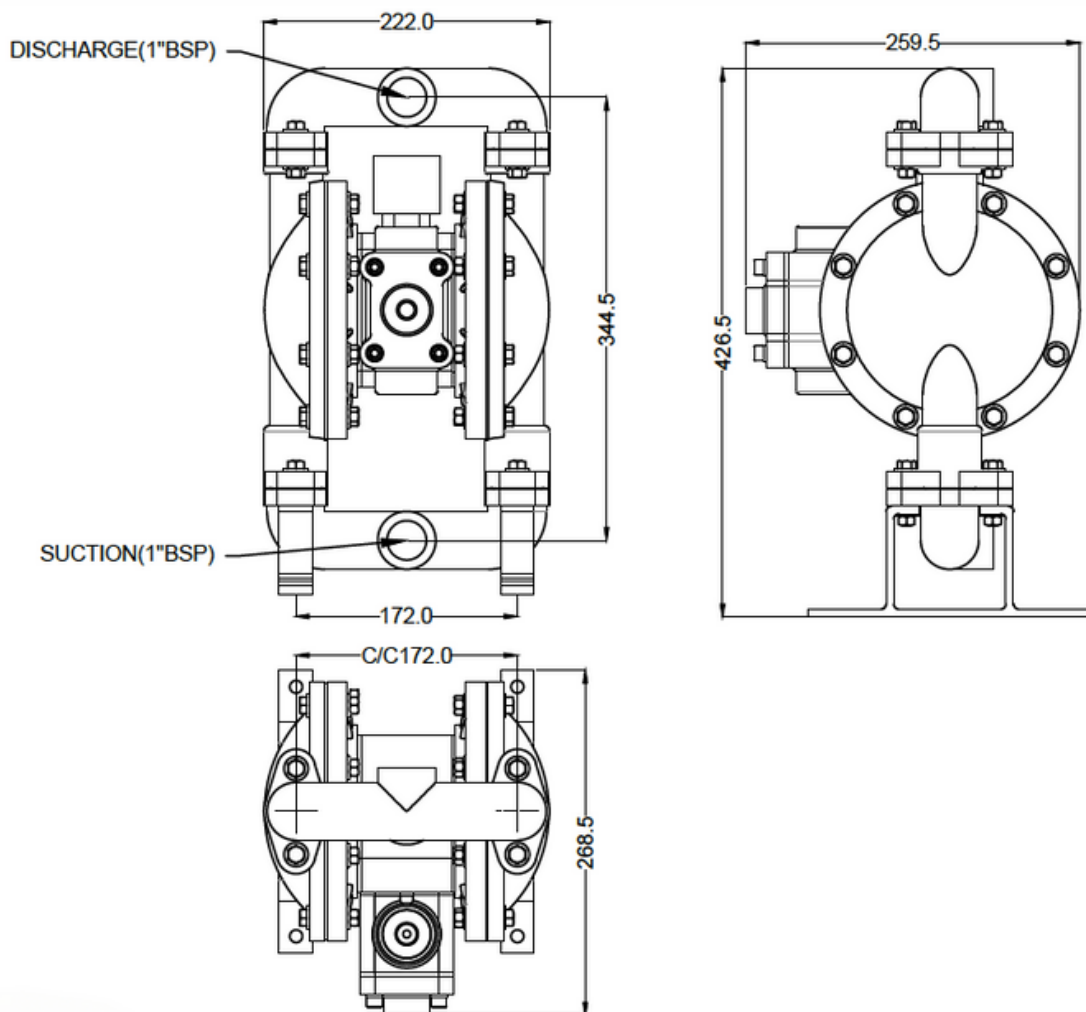

Max Flow rate :	135 Lpm
Port Size :	Inlet : 25.40mm (1" BSP) Discharge : 25.40mm (1" BSP) Air Inlet : 1/4" BSP Air Exhaust : 12.70mm (1/2 " BSP)
Suction Lift :	Dry : 3.05m (10') Wet : 4.89m (16')
Teflon :	Dry : 2.14m (7') Wet : 3.98m (13')
Max Particle Size :	3.17mm (0.125")
Weight :	13-15 Kg
Max Discharge Head :	60 meter

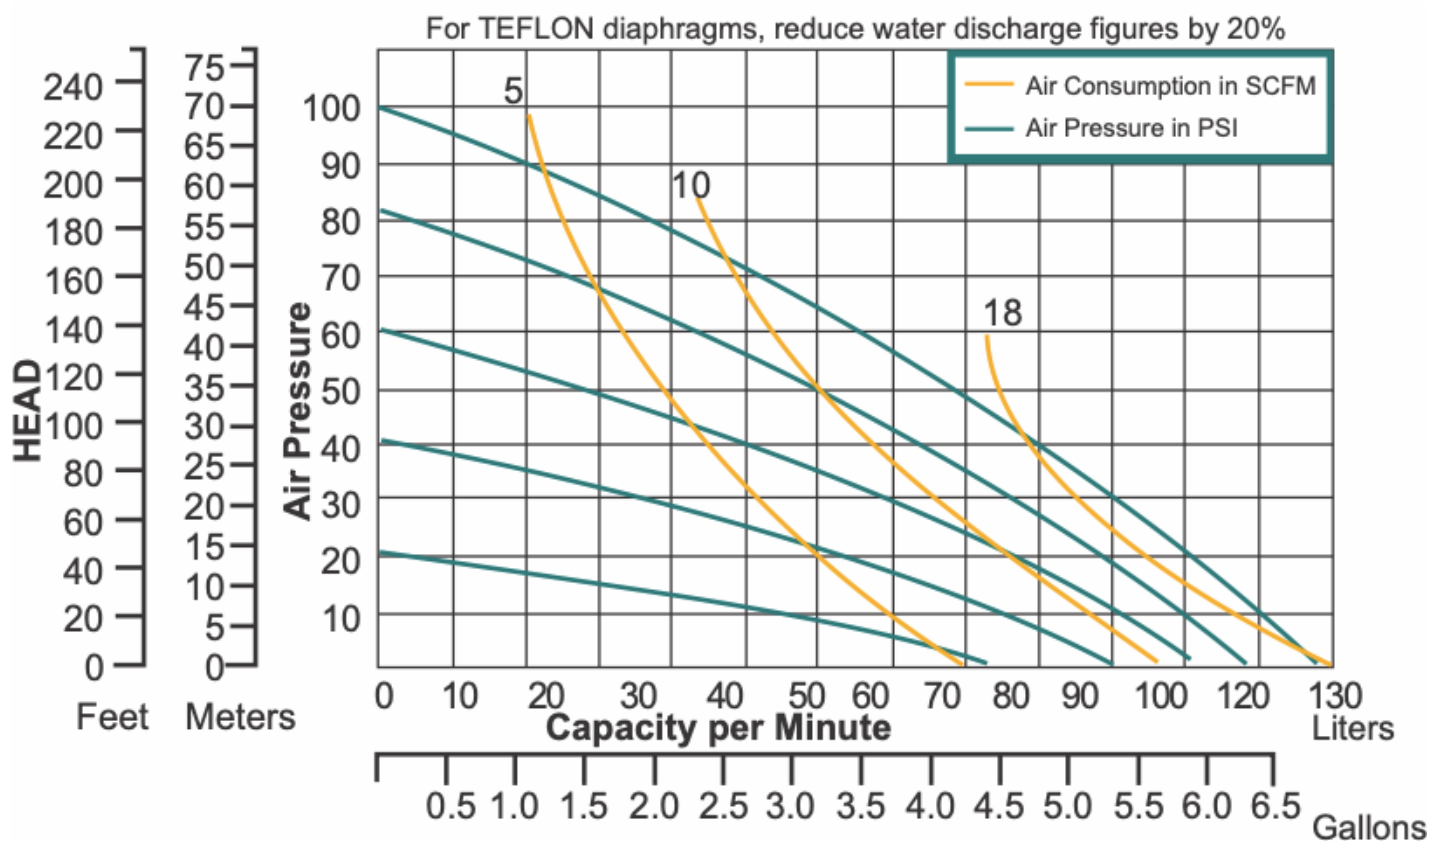

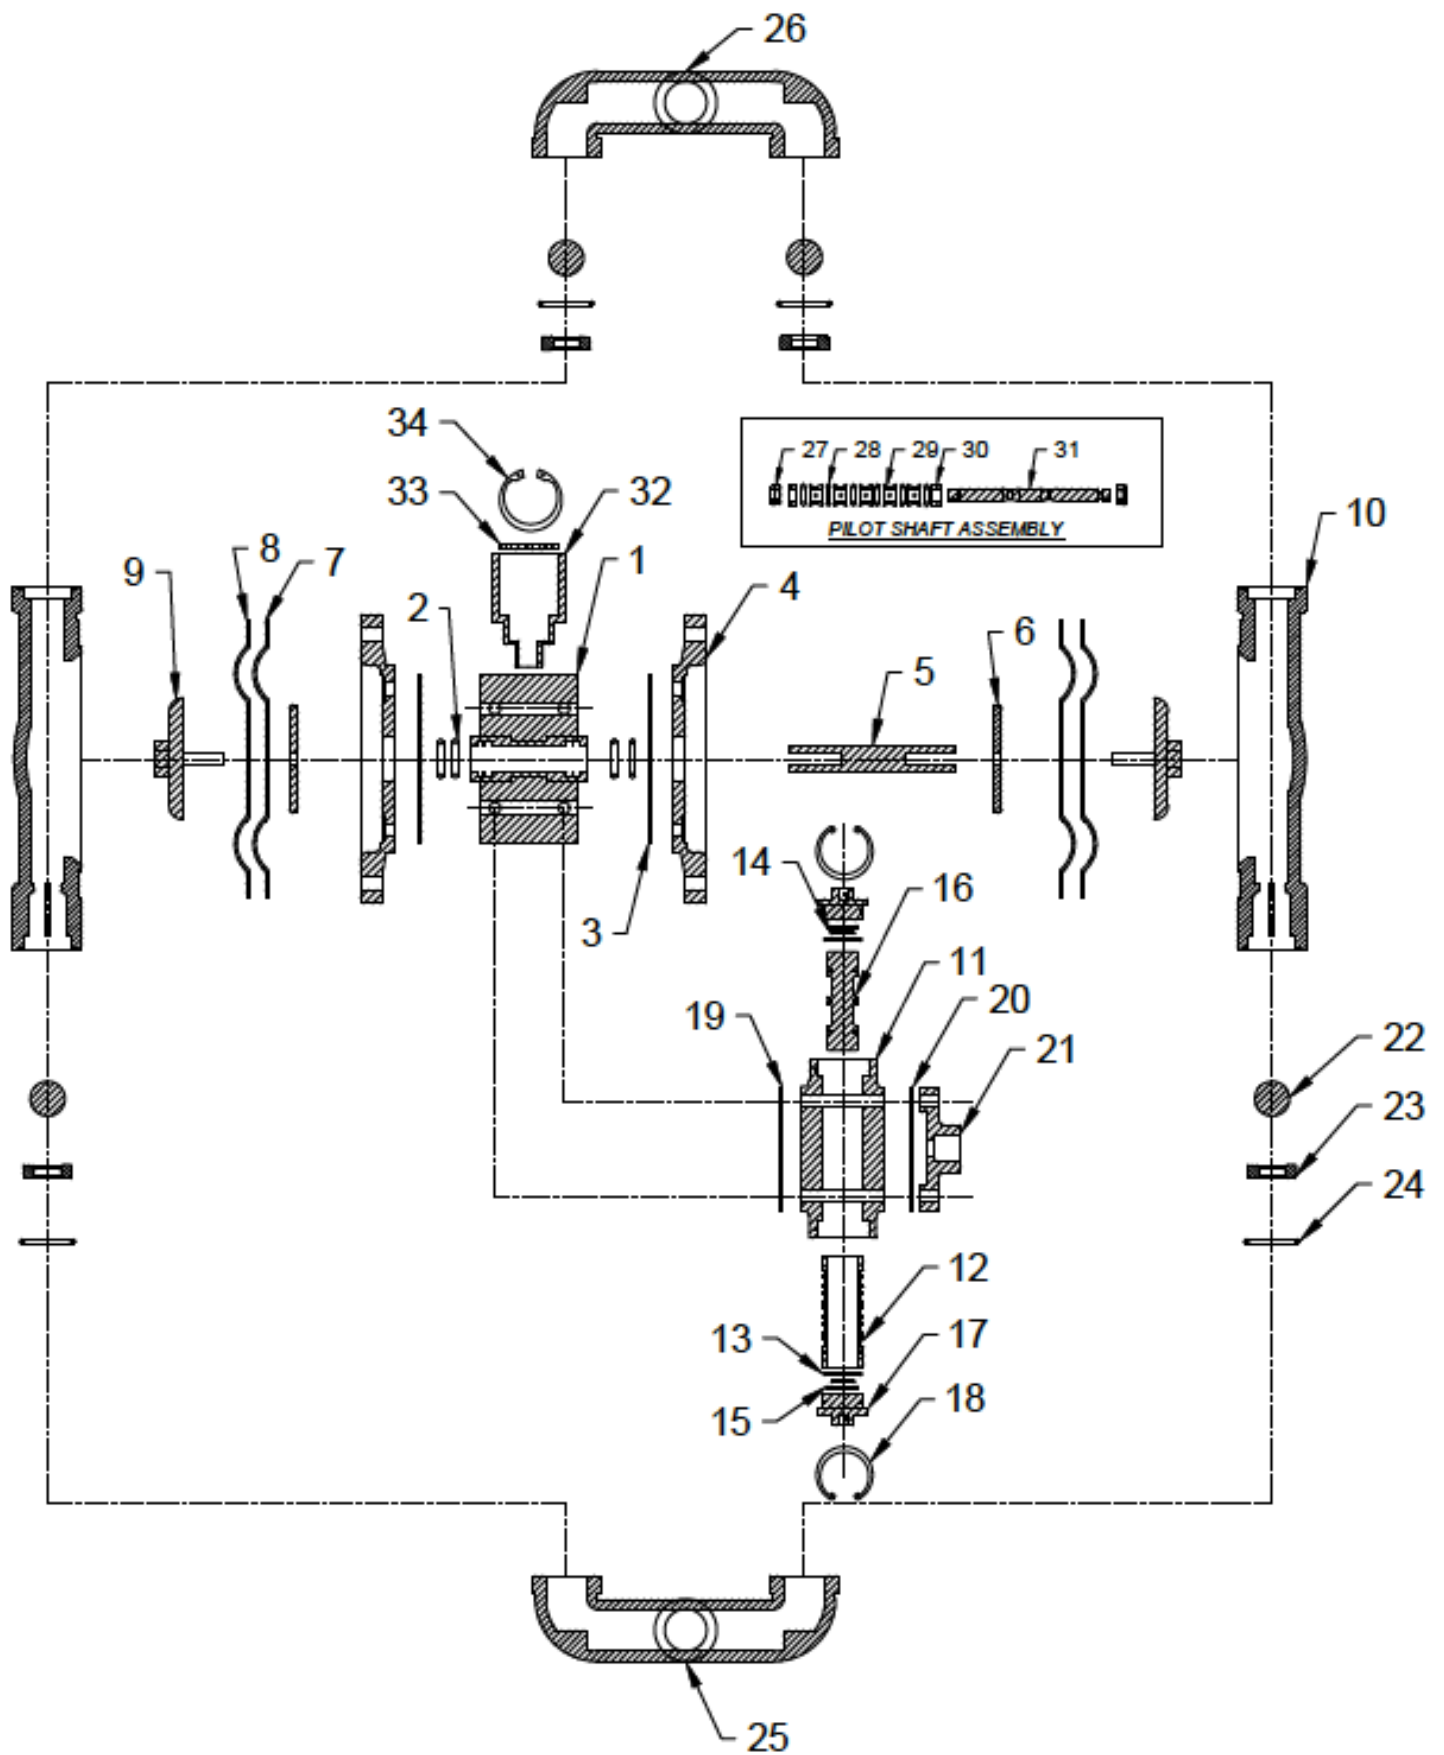

Sr No.	PART NAME	M.O.C.	Qty.	Sr No.	PART NAME	M.O.C.	Qty.
1	Shaft Block	GFPP	01	23	Ball Seat	Aluminium	04
2	Main Shaft 'O' Ring	Neoprene	04	24	Seat O Ring	Teflon	04
3	Air-Cover Gasket	non-asbestos	02	25	Suction Line	Aluminium	01
4	Air-Cover	GFPP	02	26	Discharge Line	Aluminium	01
5	Main Shaft	SS-304	01	27	Nilon Nut	SS-304	02
6	Holding Plate	SS-304	02	28	Pilot Shaft O Ring	Neoprene	06
7	Back-up	Santoprene	02	29	Pilot Bush	Brass	05
8	Diaphragm	Teflon	02	30	Plain Bush	Brass	02
9	Lock-Nut	Aluminium	02	31	Pilot Shaft	SS-304	01
10	Liquid Chamber	Aluminium	02	32	Exhausts	GFPP	01
11	Piston Block	GFPP	01	33	Exhausts Plate	PP	01
12	Piston Block Bush	Brass	01	34	Circlip	SS-304	01
13	Piston Block Bush O Ring	Neoprene	06	35	Liquid Chamber Lock Bolt & Nut 5/16"X2"	SS-304	16
14	Piston O Ring	Neoprene	03	36	Suction Line Lock Bolt & Nut 5/16"X2"	SS-304	04
15	Piston Ring	PTFE	03	37	Discharge Line Lock Bolt & Nut 5/16"X1 1/2"	SS-304	04
16	Piston	Aluminium	01	38	Air Assembly Lock Bolt & Nut 5/16"X 95mm	SS-304	04
17	Piston Block Cap	PP	02	39	Piston Block Allen Bolt 1/4" x 3 1/2"	SS-304	04
18	Circlip	SS-304	02				
19	Piston Block Gasket	non-asbestos	01				
20	Piston Block Cover Gasket	non-asbestos	01				
21	Piston Block Cover	GFPP	01				
22	NRV Ball	PTFE	04				